



# MOTOTRBO R2

## PORTABLE TWO-WAY RADIO

A next-level workhorse, the MOTOTRBO R2 marries durability and ergonomics to ensure confident, easy handling. And with superior range, configurable audio and seamless integration, the R2 is a reliable addition to an uninterrupted workday.



### KEY FEATURES

- VHF, UHF
- 64 channels
- Single-site conventional
- Extended Range Direct Mode
- Dual-Capacity Direct Mode
- IP Site Connect
- Capacity Plus single site, 2 repeaters
- Transmit Interrupt
- Dual priority scan
- Secure Enhanced Linux operating system
- Enhanced privacy
- Analogue scrambling
- Radio disable/enable
- Remote monitor
- Voice announcement
- Pre-programmed text messaging
- Loudness up to 101 phons
- SINC+ noise suppression
- Acoustic feedback suppression
- Quick Call II / MDC1200 capable
- User selectable audio profiles
- Automatic gain control
- Received audio leveling
- Sleek & ergonomic form factor
- Rugged to MIL-STD 810
- IP55 (dust and water ingress protection)
- 2 programmable buttons
- Home channel reminder
- Rental timer

# SPECIFICATIONS


## GENERAL SPECIFICATIONS

Frequency	136-174 MHz	400-470 MHz	450-527 MHz
Typical RF output			
High power	5W	4W	4W
Low power	1W	1W	1W
Channel spacing		12.5 / 20.0 / 25.0 kHz	
Channel capacity		64	
Dimension <sup>1</sup> (H x W x D) with battery			
PMNN4598 high capacity battery	125 mm x 55 mm x 37 mm		
PMNN4600 slim battery	125 mm x 55 mm x 32 mm		
Weight <sup>2</sup> with battery			
PMNN4598 high capacity battery	286 g		
PMNN4600 slim battery	261 g		
Battery life <sup>3</sup> (analogue / digital)			
PMNN4598 high capacity battery	19.5 hours / 26.5 hours		
PMNN4600 slim battery	17 hours / 22.5 hours		
Power supply		7.5V (nominal)	
FCC description	AZ489FT3852	AZ489FT4971	NA
IC description	109U-89FT3852	109U-89FT4971	NA

<sup>1</sup>Dimensions at grip area

<sup>2</sup>Excludes antenna

<sup>3</sup>Typical battery life, 5/5/90 profile at maximum transmitter power. Actual observed runtimes may vary.

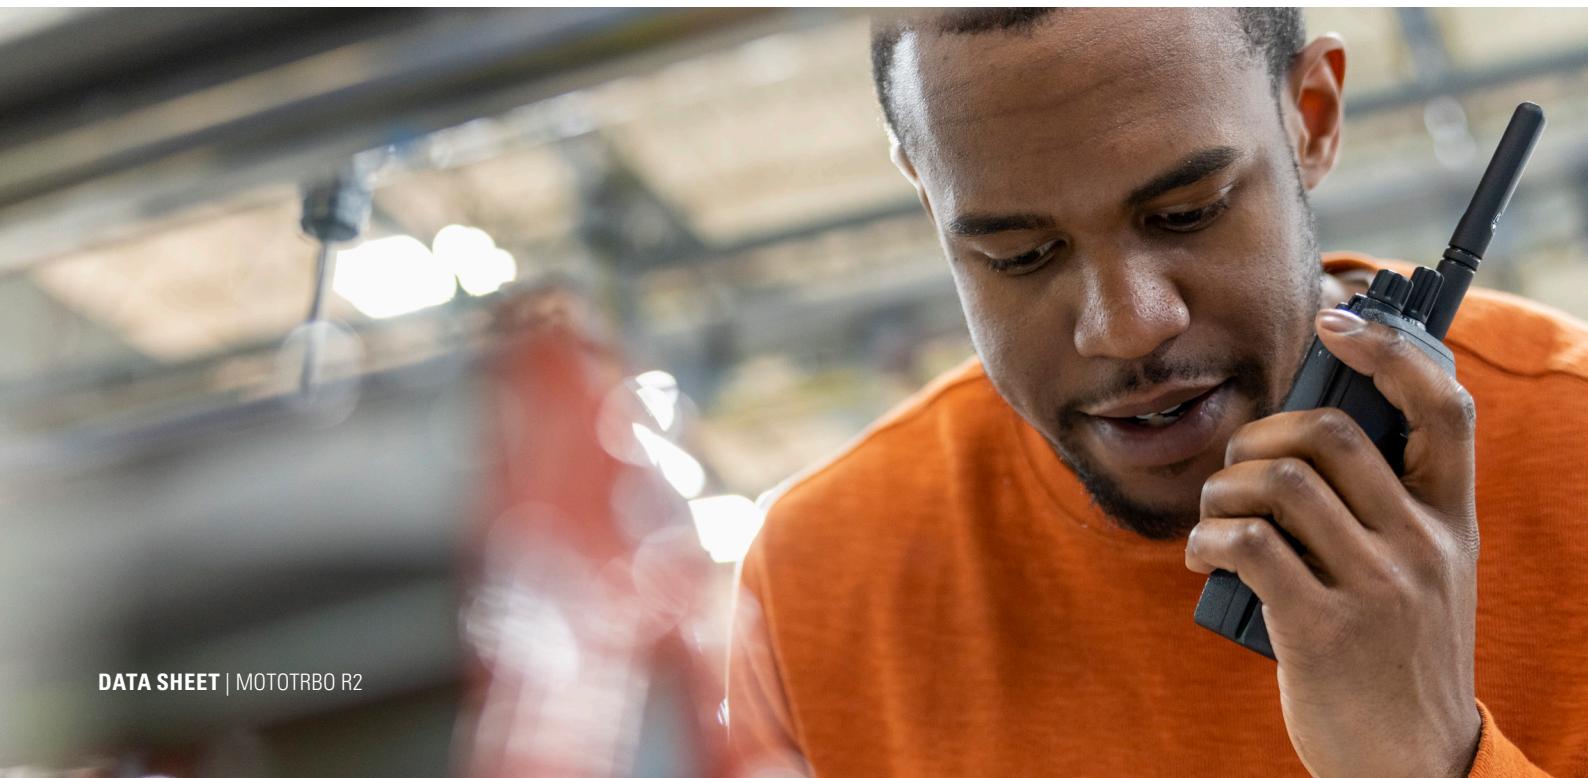

## TRANSMITTER SPECIFICATIONS

4FSK digital modulation	12.5 kHz Data: 7K60F1D and 7K60FXD 12.5 kHz Voice: 7K60F1E and 7K60FXE Combination: 7K60F1W
Digital protocol	ETSI TS 102 361-1, -2, -3 DMR Tier II
Conducted/radiated spurious emissions (TIA603E)	< -36 dBm for < 1 GHz ; < -30 dBm for > 1 GHz
Adjacent channel power	> 60 dB @ 12.5 kHz / > 70 dB @ 20/25 kHz
Frequency stability	± 0.5 ppm
Modulation limiting	± 2.5 kHz @ 12.5 kHz / ± 4.0 kHz @ 20 kHz / ± 5.0 kHz @ 25 kHz

## RECEIVER SPECIFICATIONS

Analogue sensitivity (12dB SINAD)	0.18 µV (typical)
Digital sensitivity (5% BER)	0.16 µV (typical)
Conducted/radiated spurious emissions (TIA603E)	< -57 dBm
Intermodulation (TIA603E)	> 70 dB
Adjacent channel selectivity (TIA603A)-1T	> 60 dB @ 12.5 kHz / > 70 dB @ 20/25 kHz
Adjacent channel selectivity (TIA603E)-2T	> 55 dB @ 12.5 kHz / > 70 dB @ 20/25 kHz
Spurious rejection TIA603D	> 70 dB
Frequency stability	± 0.5 ppm

## AUDIO SPECIFICATIONS

Digital vocoder type	AMBE+2
Audio response	TIA603E
Audio output power (Rated/Max)	1 W / 3 W
Audio distortion at rated power	3% (typical)
Maximum speech loudness (ISO 532B)	101 phon
Hum and noise	-45 dB @ 12.5 kHz / -45 dB @ 20/25 kHz

## ENVIRONMENTAL SPECIFICATIONS

Operating temperature <sup>1</sup>	-30 °C to 60 °C
Storage temperature <sup>1</sup>	-40 °C to 85 °C
Thermal shock	Per MIL-STD 810C, D, E, F, G, H
Humidity	Per MIL-STD 810C, D, E, F, G, H
Electrostatic discharge	IEC 61000-4-2 Level 4
Dust and water intrusion	IEC60529 IP55
Salt fog	Per MIL-STD 810C/D/E/F/G/H
Packaging test	Per MIL-STD 810C/D/E/F/G/H

## MILITARY STANDARDS (MIL-STD 810)

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G		MIL-STD 810H	
	METHOD	PROCEDURE	METHOD	PROCEDURE	METHOD	PROCEDURE	METHOD	PROCEDURE	METHOD	PROCEDURE	METHOD	PROCEDURE
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.6	II	500.6	II
High Temp	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.6	I/A1, II/A1	501.7	I/A1, II/A1
Low Temp	502.1	I	502.2	I, II	502.3	I, II	502.4	I, II	502.6	I, II	502.7	I, II
Temp Shock	503.1	I	503.2	A1/C3	503.3	A1/C3	503.4	I	503.6	I-C	503.7	I-C
Solar Radiation	505.1	II	505.2	I/A1	505.3	I/A1	505.4	I/A1	505.6	I/A1	505.7	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.6	I, III	506.6	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	-	507.6	II/Aggravated	507.6	II/Aggravated
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	-	509.6	-	509.7	-
Blowing Dust & Sand	510.1	I / -	510.2	I, II	510.3	I, II	510.4	I, II	510.6	I, II	510.7	I, II
Vibration	514.2	VIII/CatF, XI	514.3	I/Cat10, II/Cat3	514.4	I/Cat10, III/Cat3	514.5	I/Cat24, II/Cat5	514.7	I/Cat24, II/Cat5	514.8	I/Cat24, II/Cat5
Shock	516.2	I, II	516.3	I, IV	516.4	I, IV	516.5	I, IV	516.7	I, IV	516.8	I, IV

<sup>1</sup>Temperatures listed are for radio specifications.

# FEATURES

## GENERAL

Analogue and digital	•
DMR standards compliant <sup>1</sup>	•
64 channels	•
2 programmable buttons	•
Pre-programmed text messaging <sup>1</sup>	•
Voice announcements	•
Home channel reminder	•
Late entry <sup>1</sup>	•
Dual priority scan	•
Nuisance Channel Delete	•
Secure Enhanced Linux operating system	•
TLS-PSK CPS/RM - Radio/Repeater authentication	•
Rental timer	•
Internal Voice Operated Transmission (VOX)	•
Wide range of accessories	•
IP55 dust and water ingress protection	•
Rugged to MIL-STD 810	•

## AUDIO

Acoustic feedback suppressor <sup>1</sup>	•
User-selectable audio profile	•
Trill enhancement for rolling "R"s	•
SINC+ noise suppression	○
Automatic gain control	•
Received audio leveling	○

## SAFETY

Enhanced privacy <sup>1</sup>	○
Transmit interrupt <sup>1,2</sup>	•
Remote monitor <sup>2</sup>	•
Radio disable / enable <sup>2</sup>	•

## SYSTEMS

Dual Capacity Direct Mode <sup>1</sup>	•
Single-site conventional	•
Extended Range Direct Mode <sup>1</sup>	•
IP Site Connect <sup>1</sup>	•
Capacity Plus single site, two repeaters <sup>1</sup>	○

## ANALOGUE FEATURES

Lone worker	•
Emergency alert	•
Analogue scrambling	•
Quick Call II / MDC1200 capable	•

• Feature is standard

○ Feature is optional

<sup>1</sup> Digital feature

<sup>2</sup> Decode

For more information, please visit  
[motorolasolutions.com/R2](http://motorolasolutions.com/R2)



Motorola Solutions Asia Pty Ltd

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.

© 2023 Motorola Solutions, Inc. All rights reserved. 10-2023 [ANZ]

**MOTOTRBO**  
**R2**